



GREATER WELLINGTON REGIONAL COUNCIL

---

Rainwater Tank Investigation

---

Rainwater Tank Analysis Report for Porirua

# HARRISON GRIERSON CONSULTANTS LIMITED

## *Document Control Record*

**Client** GREATER WELLINGTON REGIONAL COUNCIL

**Project** Rainwater Tank Investigation

**HG Project No.** 1014-129820-01

**HG Document No.** R003v4-AK-129820-01


**Document** Rainwater Tank Analysis Report for Porirua

### ISSUE AND REVISION RECORD

**Date of Issue** January 2011

**Status** Final


**Originator**

  
-----  
Nicky Brown - Process Engineer

**Reviewed**

  
-----  
Iain Rabbitts - Principal

**Approved for Issue**

  
-----  
Iain Rabbitts - Principal

**Office of Origin** Auckland

**Telephone** 09 917 5000

**Facsimile** 09 917 5001

**Email** auckland@harrisingrierson.com

# GREATER WELLINGTON REGIONAL COUNCIL

## Rainwater Tank Investigation

### *Rainwater Tank Analysis Report for Porirua*

January 2011

HG Project No. 1014-129820-01

HG Document No. R003v4-AK-129820-01

## CONTENTS

	Page
<b>EXECUTIVE SUMMARY</b>	<b>III</b>
<b>1.0 INTRODUCTION</b>	<b>1</b>
1.1 VARIABLES	1
1.2 MODEL OUTPUTS	1
1.3 COST ANALYSIS BASIS	2
<b>2.0 MODEL SET-UP</b>	<b>3</b>
2.1 INFLOW	3
2.2 OUTFLOW	3
<b>3.0 PORIRUA RESULTS – SUMMARY</b>	<b>6</b>
<b>4.0 COST ANALYSIS</b>	<b>7</b>
<b>5.0 OTHER ISSUES</b>	<b>8</b>
5.1 STORMWATER ATTENUATION	8
5.2 EMERGENCY SUPPLY	8
5.3 AVAILABLE SPACE	8
5.4 EFFECTIVE ROOF AREAS	9
<b>6.0 SUMMARY</b>	<b>9</b>
<b>7.0 LIMITATIONS</b>	<b>10</b>
7.1 GENERAL	10

## APPENDICES

Appendix 1	Porirua Rainfall Data
Appendix 2	AJ Withrington Plumbers Ltd - Water tank system installation quote

## EXECUTIVE SUMMARY

Harrison Grierson was commissioned by Greater Wellington Regional Council (Greater Wellington) to develop a model of rainwater tanks in the urban environment for the cities in the Wellington region; Lower Hutt, Upper Hutt, Porirua and Wellington. This report presents the findings for Porirua and discusses the costs of installing rainwater tanks.

The model is set up to calculate the volume of water in the tank each day using the rainfall over the roof area as the flow into the tank and the household demand as the flow out of the tank. The tank was assumed to supply only outdoor usage and toilet flushing.

Nine runs were set up in the model to look at 3 occupancy rates, 2, 3 and 4 people per house and 3 roof sizes, 100, 150, 200 m<sup>2</sup>. The model was also run for 5,000 L and 10,000 L tanks and a dry and average summer.

The model was used to calculate the total amount of rainwater supplied to the house and the total volume of mains supply used to top up the tank. Using these outputs and a water cost of \$1.10/m<sup>3</sup>, the savings to each household through water charges reduction was calculated. The installation cost of the rainwater tank systems were also considered in order to compare the savings in water charges with the capital costs.

Through analysis of the 9 runs of the model for the two tank sizes and two years of data, the following conclusions can be drawn for Porirua:

- The total yearly demand for flushing and outdoor usage is 49,453 L, 74,179 L and 98,906 L for a 2, 3 and 4 person household respectively.
- The maximum yearly saving which can be found through using rainwater for outdoor use and toilet flushing is \$54.40, \$81.60 and \$104.30 for a 2, 3 and 4 person house respectively using a 10,000 L rainwater tank.
- The average saving found from rainwater tank use is approximately \$70.92/year for a 5,000 L tank system and \$76.97/year for a 10,000 L tank system.
- With a minimum installation cost of \$7,500 for a 5,000 L rainwater tank system, the interest charged will be approximately \$525 per annum. As the interest is significantly higher than the maximum achievable savings of \$94.57 for a 5,000 L tank, the tank system will never pay for itself through reduced water charges.
- With 15,564 properties in Porirua and an assumed engagement of 25% of householders, approximately 3,891 rainwater tanks would be installed. The total cost less savings over a 5 year period would be approximately \$33.5 million.

## 1.0 INTRODUCTION

Harrison Grierson has been commissioned by Greater Wellington to perform an analysis of rainwater tanks in the urban environment. The aim of the project was to investigate the viability of urban rainwater tanks for the four cities in the region. The four cities analysed were Lower Hutt, Upper Hutt, Porirua and Wellington. This report details the analysis of Porirua only.

The aim of the project was to model the volume of water in the tank over three years of rainfall data (July to June).

Rainfall data for a dry and average summer for each city was provided by Greater Wellington. This rainfall data formed the basis of the analysis; the set of data used for Porirua is provided in Appendix 1.

## 1.1 VARIABLES

Through consultation with Greater Wellington it was agreed that the model would be run for 9 different scenarios with the following inputs:

Run Number	Occupancy (People per House)	Roof Area (m <sup>2</sup> )
1	2	200
2	2	150
3	2	100
4	3	200
5	3	150
6	3	100
7	4	200
8	4	150
9	4	100

Greater Wellington also requested that a 5,000 L and a 10,000 L tank should be analysed giving a total of 18 runs for each city.

## 1.2 MODEL OUTPUTS

The rainwater tank model plots the volume in the tank, using the rainfall data and demand statistics to calculate the flow in and out each day. The tank has a minimum allowable volume of 10%. If the tank falls below this level it is refilled to 10% using the mains supply.

The outputs from the model discussed in this report are:

- The total volume of rainwater captured and supplied to the household by the rainwater tank.
- The total volume of water used from the mains to maintain the tank at 10%.

Other outputs such as number of non-supply days, max number of non-supply days in a row, spillage from the tank and minimum required tank volumes are discussed in the Rainwater Tank Model Analysis Report (July 2010).

### **1.3 COST ANALYSIS BASIS**

Greater Wellington also requested that a simple cost analysis be performed over the 5 years following installation of a rainwater tank. A period of 5 years is seen as a reasonable time for a householder to expect to see a return from the installation of a rainwater tank.

The cost analysis takes into consideration the cost of installing the tank, the cost of installing a water meter and manifold on the water main if required and the reduction in water charges from the use of rainwater over a 5 year period.

The rainwater supplied by the tank is used to calculate the reduction in water charges for the household, with water rates at \$1.10/m<sup>3</sup> for Porirua as specified by Greater Wellington. As detailed in the quote supplied in Appendix 2, installing a 4,500 L tank system for garden irrigation and toilet use was estimated to cost approximately \$6,300. Connecting up the downpipes from the entire roof to the tank would be a variable cost depending on the house layout and could cost between \$1,500 and \$2,000 per house. It is therefore assumed that a 5,000 L tank system would cost approximately \$7,500 to install. As a 25,000 L tank system is assumed to cost \$11,000 to install it is estimated that a 10,000 L tank system will cost \$8,500, or \$10,000 including downpipe connections. As this quote was received in 2007, these figures are considered to be conservative estimates.

An installation cost of \$127 for a manifold water meter was provided by Greater Wellington. This is the cost to install a water meter on an existing manifold. If a new manifold needs to be installed, the total cost would be \$480. These figures assume no installation complications, use of compression fittings and no long travel distances.

## 2.0 MODEL SET-UP

### 2.1 INFLOW

The inflow into the tank over a day is taken to be the roof area used multiplied by the total rainfall for that day. As agreed with Greater Wellington, it is assumed that the first 1 mm of rainfall will not be collected due to the 1<sup>st</sup> flush diverter, the potential for leaking spouting, inefficient collection and roof area restrictions. It is also assumed that rainfall from the entire roof area will be collected. For this reason the roof area used is the effective roof area.

The flow into the tank is given by the equation 1 below:

$$Flow_{IN} = (RF - RF_{LOSS}) \times RA \quad (1)$$

Where:

$RF$  - Rainfall – for that day (mm)

$RF_{LOSS}$  - Losses = 1 mm

$RA$  - Roof Area – 100 m<sup>2</sup>, 150 m<sup>2</sup> or 200 m<sup>2</sup>

### 2.2 OUTFLOW

It is assumed that the tank will be used solely for toilet flushing and outdoor usage. Greater Wellington provided statistics for toilet flushing and outdoor usage demand over the summer and winter months. These were given as a percentage of the total demand and are presented in the table below:

<b>Season</b>	<b>Toilet Flushing (% of DD)</b>	<b>Outdoor Usage (% of DD)</b>	<b>Total RTU (% of DD)</b>
Spring / Summer	17.5%	17%	34.5%
Autumn / Winter	18.5%	6%	24.5%

Greater Wellington provided the average daily demand for each city and the variation in demand over the year. For Porirua the average was 230 L/person/day, with monthly variation as shown in table 3.

<b>Table 3: Monthly Demand Variations (MDV)</b>			
<b>Month</b>	<b>Daily Demand Variation (% of DD)</b>	<b>Monthly Rainwater Tank Usage (% of DD)</b>	<b>Daily Demand (L/person/day)</b>
January	107%	34.5%	84.90
February	111%	34.5%	88.08
March	105%	24.5%	59.17
April	98%	24.5%	55.22
May	96%	24.5%	54.10
June	95%	24.5%	53.53
July	95%	24.5%	53.53
August	95%	24.5%	53.53
September	95%	34.5%	75.38
October	96%	34.5%	76.18
November	102%	34.5%	80.94
December	101%	34.5%	80.14

Using the daily demand per person (DD) for each city, the monthly demand variation (MDV) and the varying rainwater tank usage (RTU) the flow out of the rainwater tank is given by the equation below:

$$Flow_{OUT} = DD_{CITY} \times MDV_{MONTH} \times RTU_{SEASON} \times OCC \quad (2)$$

Where:

- DD* - Daily Demand – 230 L/person/day
- MDV* - Monthly Demand Variation – for a specific month (% of DD)
- RTU* - Rainwater Tank Usage – for a specific season (% of DD)
- OCC* - Occupancy rate – 2, 3 or 4 people/house (p/h)

The governing equation for the model as presented below is assumed to be the previous day's volume, plus the inflow (rainfall), minus the outflow (demand):

$$V_{TANK} = V_{PREVIOUS} + Flow_{IN} - Flow_{OUT} \quad (3)$$



Where:

$V_{TANK}$  - Current Tank Volume (L)

$V_{PREVIOUS}$  - Previous Day's Tank Volume (L)

If the total rainfall for one day is less than the minimum harvest (1mm) then it is assumed no water is collected for the rainwater tank (i.e.  $Flow_{IN}$  cannot be negative). It is also assumed that the tank starts at 20% full on the 1<sup>st</sup> of July, i.e. the initial volume of the 10,000L tank is 2,000 L and the initial volume of the 5,000 L tank is 1,000 L.

The current tank volume is calculated for each consecutive day using equation 3 above. Each day the specific rainfall data for that day and the specific demand for that month and season are used.

A 10% buffer volume was incorporated into the model. This was to represent the scenario where the mains water supply would be used to top up the tank when it reached a low level. This meant that if the tank volume is calculated to be below 10%, the volume is returned to 10% and the difference is recorded as "mains supply volume".

Of interest to Greater Wellington was the volume of water used from the tank which was supplied by the collected rain and not the mains top-up. This was calculated as the total demand from the tank minus the mains supply volume and was recorded as "rainwater supply". This rainwater supply will be equivalent to the cost savings for the household.

### 3.0 PORIRUA RESULTS – SUMMARY

The following tables show the total rainwater used, the total mains supply top-up (to maintain the tank at 10%) and the equivalent saving through reduction in water charges for each household over year 1 (average summer) and year 2 (dry summer). The total annual water demand for a 2, 3 or 4 person household is on average 167,900 L, 251,850 L and 335,800 L respectively. The total annual demand for outdoor use and toilet flushing for a 2, 3 or 4 person household is on average 49,453 L, 74,179 L and 98,906 L respectively.

<b>Table 4: Porirua Council Rainwater Tank Model Outputs</b>										
Tank Size	Roof Size (m <sup>2</sup> )	2 People per House			3 People per House			4 People per House		
		Mains Supply Top-up (L)	Total Rainwater Supply (L)	Reduction In Water Charges	Mains Supply Top-up (L)	Total Rainwater Supply (L)	Reduction In Water Charges	Mains Supply Top-up (L)	Total Rainwater Supply (L)	Reduction In Water Charges
<b>YEAR 1 (average summer)</b>										
5,000L	200	1,331	48,122	\$52.93	5,538	68,642	\$75.51	12,929	85,977	\$94.57
	150	1,681	47,772	\$52.55	6,049	68,131	\$74.94	15,782	83,124	\$91.44
	100	2,031	47,422	\$52.16	9,034	65,146	\$71.66	23,017	75,889	\$83.48
10,000 L	200	606	48,847	\$53.73	1,409	72,771	\$80.05	4,061	94,845	\$104.33
	150	606	48,847	\$53.73	1,409	72,771	\$80.05	4,411	94,495	\$103.94
	100	606	48,847	\$53.73	1,409	72,771	\$80.05	12,576	86,330	\$94.96
<b>YEAR 2 (dry summer)</b>										
5,000L	200	618	48,835	\$53.72	3,846	70,333	\$77.37	13,697	85,209	\$93.73
	150	868	48,585	\$53.44	6,463	67,717	\$74.49	19,235	79,672	\$87.64
	100	2,043	47,410	\$52.15	15,584	58,595	\$64.45	34,929	63,977	\$70.37
10,000 L	200	0	49,453	\$54.40	0	74,180	\$81.60	4,087	94,820	\$104.30
	150	0	49,453	\$54.40	815	73,365	\$80.70	9,777	89,129	\$98.04
	100	0	49,453	\$54.40	7,980	66,200	\$72.82	25,929	72,977	\$80.27

From the table we can calculate that the average reduction in water charges for a 5,000 L tank is \$70.92/year and the average reduction for a 10,000 L tank is \$76.97/year. Note that "Total Rainwater Supply" assumes the entire roof area is used for rainwater collection.

## 4.0 COST ANALYSIS

The total yearly demand for flushing and outdoor usage is 49,453 L, 74,179 L and 98,906 L for a 2, 3 and 4 person household respectively for Porirua. This equates to a maximum water charges reduction of \$54.40, \$81.60 and \$104.33 respectively are achieved with a 10,000L tank.

The lowest cost scenario would be to install a 5000 L tank system with no manifold or water meter required. The cost for this option would be \$7,500.

With an interest rate of 7%, the interest charged would be \$525 per annum. As this value is much higher than the maximum savings from reduced water charges, the capital would never be paid back through water savings.

If interest is disregarded, the maximum saving that can be achieved from rainwater tank use (\$94.57 for a 5,000 L tank and \$104.33 for a 10,000 L tank) will take 79 years to re-pay the cost of the 5,000 L tank system (\$7500) excluding the water meter installation, and 96 years for the 10,000 L tank system (\$10,000). This is substantially more than the useful life of the tank system.

In order to evaluate the financial viability of implementing rainwater tanks a simple cost analysis was performed looking at the 5 year period after installation of the tank system. A 5 year period was used as a reasonable period for the consumer to expect a payback from the tank system installation. This analysis weighed the cost of installing the tank system with or without the water meter and manifold against the total reduction in water charges over the 5 year period.

The saving in water charges for a household with a 5,000 L tank system, considering an average yearly saving of \$70.92 over a 5 year period:

$$\begin{aligned} \text{Savings} &= \$70.92 \times 5 \text{ years} \\ &= \$355 \end{aligned}$$

Excluding interest charges, the cost to an average household of installing a 5,000 L tank system, manifold and manifold water meter with \$488 saving in water charges over 5 years is shown below. The assumed installation costs are \$7,500 for the tank and \$480 for the manifold and water meter:

$$\begin{aligned} \text{Total}_{\text{Household}} &= \$7,500 + \$480 - \$355 \\ &= \$7,625 \end{aligned}$$

Table 5 shows the cost of both 5,000 L and 10,000 L rainwater systems (excluding interest charges) with and without meter and manifold required. The total cost, assuming 25% of the 15,564 properties in Porirua install rainwater systems, is also shown. This is compared with the average total savings from reduced water charges over 5 years.

<b>Table 5: Porirua Rainwater Tanks Cost Analysis Summary</b>					
<b>Tank Size</b>	<b>Installation Cost</b>			<b>Total Cost 25% Properties</b>	<b>Total Savings over 5 years</b>
	<b>Tank System</b>	<b>Water Meter</b>	<b>Manifold</b>		
5,000 L	\$7,500	-	-	\$29 million	\$1.4 million
5,000 L	\$7,500	\$127	-	\$30 million	\$1.4 million
5,000 L	\$7,500	\$127	\$353	\$31 million	\$1.4 million
10,000 L	\$10,000	-	-	\$39 million	\$1.5 million
10,000 L	\$10,000	\$127	-	\$39 million	\$1.5 million
10,000 L	\$10,000	\$127	\$353	\$41 million	\$1.5 million
<b>AVERAGE</b>				<b>\$35 million</b>	<b>\$1.44 million</b>

## 5.0 OTHER ISSUES

### 5.1 STORMWATER ATTENUATION

There is a possibility that the rainwater tanks could also function as a stormwater tank. However the purpose for having a stormwater tank is that it is empty at the start of a storm event so that it can contain the rush of water and release it slowly. Whereas a water supply tank gradually collects water and retains it until it is needed. It is likely that a rainwater tank would be full at the start of a storm event. Additionally, for rainwater tanks to operate effectively as a stormwater control device in an urban environment, stormwater tanks should be implemented as part of an integrated catchment management plan.

### 5.2 EMERGENCY SUPPLY

In the event of an emergency, such as an earthquake, where all the water lines are disconnected, then a rainwater tank would prove very effective in assuring that a water supply is available. Whilst at full demand a 5,000 litre tank would provide only 22 man days of supply, it is likely that in this event that consumers would naturally ration water usage. Rainwater tanks can provide an effective emergency supply in the event of a civil defence emergency.

### 5.3 AVAILABLE SPACE

A major issue in an urban environment is space. Many sections currently being sold have areas less than 500m<sup>2</sup>. With 200m<sup>2</sup> houses built on 400m<sup>2</sup> sections, this leaves minimal room to fit a rainwater tank, which can have a diameter in excess of 2.5 m. Options such as under deck tanks, below ground tanks or

under eave tanks save a lot of space but come with much more difficult (and expensive) installations. To install a tank under an existing deck the deck would have to be demolished prior to installing the tank and rebuilt after. For installing a tank below ground, a large hole would need to be excavated in order to fit the tank. Having a tank under the eaves of a house would greatly decrease the natural light entering through the windows. On steep sections the installation of rainwater tanks can be difficult and costly. Implementation of rainwater tanks needs to consider the available space.

#### **5.4 EFFECTIVE ROOF AREAS**

This report calculates values based on the fact that all the rain landing on the roof area is being transferred into one tank. In reality this would be very difficult. On existing houses, there would have to be extensive changes to the existing gutter system to redirect all the rainwater into one tank. On new houses, it would be a significant design point on which to focus, in order to direct all the rainwater into one tank.

### **6.0 SUMMARY**

Through analysis of the 9 runs of the model for the two tank sizes and two years of data, the following conclusions can be drawn for Porirua:

- The total yearly demand for flushing and outdoor usage is 49,453 L, 74,179 L and 98,906 L for a 2, 3 and 4 person household respectively.
- The maximum yearly saving which can be found through using rainwater for outdoor use and toilet flushing is \$54.40, \$81.60 and \$104.33 for a 2, 3 and 4 person house respectively using a 10,000 L rainwater tank.
- The average saving found from rainwater tank use is approximately \$70.92/year for a 5,000 L tank system and \$76.97/year for a 10,000 L tank system.
- With a minimum installation cost of \$7,500 for a 5,000 L rainwater tank system, the interest charged will be approximately \$525 per annum. As the interest is significantly higher than the maximum achievable savings of \$94.57 for a 5,000 L tank, the tank system will never pay for itself through reduced water charges.
- With 15,564 properties in Porirua and an assumed engagement of 25% of householders, approximately 3,891 rainwater tanks would be installed. The total cost less savings over a 5 year period would be approximately \$33.5 million.

## **7.0 LIMITATIONS**

### **7.1 GENERAL**

This report is for the use by Greater Wellington Regional Council only, and should not be used or relied upon by any other person or entity or for any other project.

This report has been prepared for the particular project described to us and its extent is limited to the scope of work agreed between the client and Harrison Grierson Consultants Limited. No responsibility is accepted by Harrison Grierson Consultants Limited or its directors, servants, agents, staff or employees for the accuracy of information provided by third parties and/or the use of any part of this report in any other context or for any other purposes.

N:\1014\129820\_01\500 Del\510 Reports\R003v4-AK129820-01-PCC.docx

# **APPENDIX 1**

## **Porirua Rainfall Data**

PCC Whenua Tapu Average Year	
Time	Rainfall
1/07/2001	0
2/07/2001	0.5
3/07/2001	0
4/07/2001	0
5/07/2001	0
6/07/2001	0
7/07/2001	0
8/07/2001	0
9/07/2001	0
10/07/2001	0
11/07/2001	0
12/07/2001	0
13/07/2001	0
14/07/2001	0
15/07/2001	1
16/07/2001	9
17/07/2001	5.5
18/07/2001	27.5
19/07/2001	3
20/07/2001	13
21/07/2001	13.5
22/07/2001	16
23/07/2001	13.5
24/07/2001	0
25/07/2001	1
26/07/2001	0
27/07/2001	0
28/07/2001	0
29/07/2001	0
30/07/2001	13.5
31/07/2001	0
1/08/2001	1.5
2/08/2001	0.5
3/08/2001	0.5
4/08/2001	0
5/08/2001	0
6/08/2001	0
7/08/2001	0
8/08/2001	0.5
9/08/2001	2.5
10/08/2001	5.5
11/08/2001	1
12/08/2001	0
13/08/2001	0
14/08/2001	0.5
15/08/2001	6.5
16/08/2001	17.5
17/08/2001	1
18/08/2001	0

PCC Whenua Tapu Average Year	
Time	Rainfall
1/07/2006	0
2/07/2006	0
3/07/2006	0
4/07/2006	0
5/07/2006	10.5
6/07/2006	25.5
7/07/2006	17.5
8/07/2006	6.5
9/07/2006	0
10/07/2006	0
11/07/2006	0
12/07/2006	4.5
13/07/2006	14
14/07/2006	0
15/07/2006	2
16/07/2006	4
17/07/2006	1
18/07/2006	0
19/07/2006	0
20/07/2006	10
21/07/2006	7.5
22/07/2006	7
23/07/2006	0
24/07/2006	0.5
25/07/2006	0
26/07/2006	0
27/07/2006	0
28/07/2006	0
29/07/2006	0
30/07/2006	0
31/07/2006	4
1/08/2006	0
2/08/2006	0
3/08/2006	19
4/08/2006	23
5/08/2006	0
6/08/2006	0
7/08/2006	17
8/08/2006	14.5
9/08/2006	6.5
10/08/2006	8
11/08/2006	0
12/08/2006	0
13/08/2006	0
14/08/2006	0
15/08/2006	10.5
16/08/2006	3
17/08/2006	0
18/08/2006	0



PCC Whenua Tapu Average Year	
Time	Rainfall
19/08/2001	0.5
20/08/2001	0.5
21/08/2001	0
22/08/2001	5.5
23/08/2001	4.5
24/08/2001	14
25/08/2001	24
26/08/2001	9.5
27/08/2001	1
28/08/2001	0
29/08/2001	0
30/08/2001	0
31/08/2001	0
1/09/2001	0
2/09/2001	0
3/09/2001	0
4/09/2001	0
5/09/2001	0
6/09/2001	2
7/09/2001	0
8/09/2001	0
9/09/2001	0
10/09/2001	0
11/09/2001	0
12/09/2001	0
13/09/2001	0
14/09/2001	0
15/09/2001	0
16/09/2001	2.5
17/09/2001	3.5
18/09/2001	0
19/09/2001	2.5
20/09/2001	0
21/09/2001	0
22/09/2001	0
23/09/2001	0
24/09/2001	0
25/09/2001	0
26/09/2001	0
27/09/2001	0
28/09/2001	0
29/09/2001	1.5
30/09/2001	0
1/10/2001	0
2/10/2001	0
3/10/2001	0
4/10/2001	0
5/10/2001	0
6/10/2001	0

PCC Whenua Tapu Average Year	
Time	Rainfall
19/08/2006	0
20/08/2006	0.5
21/08/2006	1
22/08/2006	3
23/08/2006	2
24/08/2006	0
25/08/2006	2
26/08/2006	7
27/08/2006	43
28/08/2006	0
29/08/2006	0
30/08/2006	0
31/08/2006	0
1/09/2006	0
2/09/2006	0
3/09/2006	0
4/09/2006	0
5/09/2006	6.5
6/09/2006	0
7/09/2006	3
8/09/2006	5
9/09/2006	0
10/09/2006	0
11/09/2006	0
12/09/2006	0
13/09/2006	0
14/09/2006	0
15/09/2006	0
16/09/2006	0
17/09/2006	0
18/09/2006	0
19/09/2006	0
20/09/2006	0.5
21/09/2006	0
22/09/2006	0
23/09/2006	1.5
24/09/2006	0
25/09/2006	0
26/09/2006	1
27/09/2006	0
28/09/2006	6
29/09/2006	2.5
30/09/2006	1.5
1/10/2006	3.5
2/10/2006	4
3/10/2006	8.5
4/10/2006	0
5/10/2006	8
6/10/2006	1.5

PCC Whenua Tapu Average Year	
Time	Rainfall
7/10/2001	0
8/10/2001	42
9/10/2001	6.5
10/10/2001	8.5
11/10/2001	9.5
12/10/2001	6.5
13/10/2001	0
14/10/2001	0
15/10/2001	0
16/10/2001	2
17/10/2001	6
18/10/2001	0
19/10/2001	2
20/10/2001	0.5
21/10/2001	12.5
22/10/2001	2.5
23/10/2001	0
24/10/2001	0
25/10/2001	8
26/10/2001	0
27/10/2001	1.5
28/10/2001	2.5
29/10/2001	35
30/10/2001	0
31/10/2001	2.5
1/11/2001	19.5
2/11/2001	10
3/11/2001	0.5
4/11/2001	19
5/11/2001	6
6/11/2001	0
7/11/2001	0
8/11/2001	0
9/11/2001	0
10/11/2001	0
11/11/2001	0.5
12/11/2001	0
13/11/2001	0
14/11/2001	23.5
15/11/2001	17.5
16/11/2001	0
17/11/2001	0
18/11/2001	0
19/11/2001	0
20/11/2001	0
21/11/2001	0
22/11/2001	24.5
23/11/2001	66
24/11/2001	10

PCC Whenua Tapu Average Year	
Time	Rainfall
7/10/2006	1
8/10/2006	0
9/10/2006	0
10/10/2006	5.5
11/10/2006	0
12/10/2006	0
13/10/2006	0
14/10/2006	0
15/10/2006	0.5
16/10/2006	0
17/10/2006	3
18/10/2006	0.5
19/10/2006	0
20/10/2006	3.5
21/10/2006	0
22/10/2006	0
23/10/2006	21
24/10/2006	15
25/10/2006	18
26/10/2006	0
27/10/2006	0
28/10/2006	1.5
29/10/2006	0
30/10/2006	40.5
31/10/2006	3.5
1/11/2006	0
2/11/2006	0
3/11/2006	0
4/11/2006	0
5/11/2006	0
6/11/2006	1.5
7/11/2006	4.5
8/11/2006	26.5
9/11/2006	11.5
10/11/2006	1.5
11/11/2006	0
12/11/2006	0.5
13/11/2006	0
14/11/2006	0
15/11/2006	2.5
16/11/2006	9
17/11/2006	3.5
18/11/2006	38
19/11/2006	31
20/11/2006	0.5
21/11/2006	0
22/11/2006	0.5
23/11/2006	0
24/11/2006	0

PCC Whenua Tapu Average Year	
Time	Rainfall
25/11/2001	0.5
26/11/2001	0
27/11/2001	0
28/11/2001	0
29/11/2001	0
30/11/2001	0
1/12/2001	0
2/12/2001	3
3/12/2001	2
4/12/2001	4.5
5/12/2001	9
6/12/2001	22
7/12/2001	0
8/12/2001	0
9/12/2001	0
10/12/2001	0
11/12/2001	0
12/12/2001	0
13/12/2001	0
14/12/2001	5.5
15/12/2001	0
16/12/2001	0
17/12/2001	2.5
18/12/2001	5
19/12/2001	11.5
20/12/2001	4.5
21/12/2001	0
22/12/2001	0
23/12/2001	0
24/12/2001	3
25/12/2001	0
26/12/2001	0
27/12/2001	0
28/12/2001	16.5
29/12/2001	2.5
30/12/2001	0
31/12/2001	0
1/01/2002	0
2/01/2002	0
3/01/2002	0
4/01/2002	0
5/01/2002	8.5
6/01/2002	0
7/01/2002	0
8/01/2002	0
9/01/2002	0
10/01/2002	6.5
11/01/2002	0
12/01/2002	0

PCC Whenua Tapu Average Year	
Time	Rainfall
25/11/2006	0.5
26/11/2006	0
27/11/2006	2
28/11/2006	1
29/11/2006	0
30/11/2006	0
1/12/2006	22
2/12/2006	0
3/12/2006	0
4/12/2006	0
5/12/2006	0.5
6/12/2006	0
7/12/2006	0
8/12/2006	0
9/12/2006	7.5
10/12/2006	3.5
11/12/2006	0
12/12/2006	0
13/12/2006	0
14/12/2006	2
15/12/2006	0
16/12/2006	0
17/12/2006	0
18/12/2006	10.5
19/12/2006	0
20/12/2006	0.5
21/12/2006	28.5
22/12/2006	1
23/12/2006	0
24/12/2006	0.5
25/12/2006	2.5
26/12/2006	3
27/12/2006	2
28/12/2006	5
29/12/2006	5
30/12/2006	0
31/12/2006	1.5
1/01/2007	0
2/01/2007	0.5
3/01/2007	9
4/01/2007	0
5/01/2007	0
6/01/2007	0
7/01/2007	0
8/01/2007	0
9/01/2007	0
10/01/2007	2.5
11/01/2007	22
12/01/2007	0

PCC Whenua Tapu Average Year	
Time	Rainfall
13/01/2002	32
14/01/2002	4.5
15/01/2002	2
16/01/2002	33.5
17/01/2002	0
18/01/2002	0
19/01/2002	0
20/01/2002	0.5
21/01/2002	2.5
22/01/2002	0
23/01/2002	0
24/01/2002	0
25/01/2002	0
26/01/2002	0
27/01/2002	0
28/01/2002	0
29/01/2002	0
30/01/2002	0
31/01/2002	0
1/02/2002	0
2/02/2002	0
3/02/2002	0
4/02/2002	0
5/02/2002	0
6/02/2002	45.5
7/02/2002	0
8/02/2002	0
9/02/2002	0
10/02/2002	0
11/02/2002	0
12/02/2002	25
13/02/2002	0
14/02/2002	4
15/02/2002	0.5
16/02/2002	0
17/02/2002	0.5
18/02/2002	0
19/02/2002	0
20/02/2002	1.5
21/02/2002	0
22/02/2002	0
23/02/2002	0
24/02/2002	10.5
25/02/2002	0
26/02/2002	0
27/02/2002	0
28/02/2002	0
1/03/2002	0
2/03/2002	2.5

PCC Whenua Tapu Average Year	
Time	Rainfall
13/01/2007	0.5
14/01/2007	1.5
15/01/2007	11.5
16/01/2007	0
17/01/2007	0
18/01/2007	0
19/01/2007	0
20/01/2007	0
21/01/2007	0
22/01/2007	0
23/01/2007	0
24/01/2007	0
25/01/2007	0
26/01/2007	0
27/01/2007	0
28/01/2007	0
29/01/2007	11.5
30/01/2007	28.5
31/01/2007	3.5
1/02/2007	0
2/02/2007	4.5
3/02/2007	0
4/02/2007	0
5/02/2007	0
6/02/2007	0
7/02/2007	0
8/02/2007	0
9/02/2007	0
10/02/2007	3
11/02/2007	0
12/02/2007	0
13/02/2007	0
14/02/2007	0
15/02/2007	0
16/02/2007	0
17/02/2007	2
18/02/2007	0
19/02/2007	0
20/02/2007	0
21/02/2007	0
22/02/2007	0
23/02/2007	0
24/02/2007	2
25/02/2007	0
26/02/2007	0
27/02/2007	0
28/02/2007	0
1/03/2007	0
2/03/2007	2

PCC Whenua Tapu Average Year	
Time	Rainfall
3/03/2002	7.5
4/03/2002	0
5/03/2002	0
6/03/2002	0
7/03/2002	0
8/03/2002	0
9/03/2002	6
10/03/2002	0
11/03/2002	0
12/03/2002	0
13/03/2002	0
14/03/2002	0
15/03/2002	1
16/03/2002	0
17/03/2002	0
18/03/2002	0
19/03/2002	13.5
20/03/2002	0.5
21/03/2002	12.5
22/03/2002	20
23/03/2002	1
24/03/2002	0
25/03/2002	0
26/03/2002	0
27/03/2002	0
28/03/2002	0
29/03/2002	0
30/03/2002	0
31/03/2002	1
1/04/2002	0
2/04/2002	0.5
3/04/2002	4.5
4/04/2002	0
5/04/2002	0
6/04/2002	3.5
7/04/2002	4
8/04/2002	2
9/04/2002	0
10/04/2002	0
11/04/2002	0
12/04/2002	0
13/04/2002	0
14/04/2002	0
15/04/2002	0
16/04/2002	0
17/04/2002	0
18/04/2002	0
19/04/2002	0
20/04/2002	0

PCC Whenua Tapu Average Year	
Time	Rainfall
3/03/2007	0
4/03/2007	0
5/03/2007	0
6/03/2007	0
7/03/2007	0
8/03/2007	0
9/03/2007	0
10/03/2007	0
11/03/2007	0
12/03/2007	0
13/03/2007	0
14/03/2007	10.5
15/03/2007	16.5
16/03/2007	1
17/03/2007	0
18/03/2007	6.5
19/03/2007	3
20/03/2007	0
21/03/2007	0
22/03/2007	0
23/03/2007	0
24/03/2007	0
25/03/2007	0
26/03/2007	0
27/03/2007	0
28/03/2007	0
29/03/2007	0
30/03/2007	0
31/03/2007	2
1/04/2007	1
2/04/2007	0
3/04/2007	0
4/04/2007	0
5/04/2007	2
6/04/2007	0
7/04/2007	0
8/04/2007	0
9/04/2007	0
10/04/2007	0
11/04/2007	0
12/04/2007	1
13/04/2007	9
14/04/2007	1
15/04/2007	0
16/04/2007	0
17/04/2007	0
18/04/2007	0
19/04/2007	0
20/04/2007	0

PCC Whenua Tapu Average Year	
Time	Rainfall
21/04/2002	0
22/04/2002	0
23/04/2002	1
24/04/2002	0
25/04/2002	0
26/04/2002	0
27/04/2002	2
28/04/2002	0
29/04/2002	27
30/04/2002	1
1/05/2002	0.5
2/05/2002	0
3/05/2002	0.5
4/05/2002	0
5/05/2002	0
6/05/2002	0
7/05/2002	0
8/05/2002	0
9/05/2002	0
10/05/2002	0
11/05/2002	0
12/05/2002	0
13/05/2002	1.5
14/05/2002	0
15/05/2002	0
16/05/2002	0
17/05/2002	0
18/05/2002	0
19/05/2002	0
20/05/2002	2.5
21/05/2002	5.5
22/05/2002	17
23/05/2002	15
24/05/2002	19
25/05/2002	5
26/05/2002	0
27/05/2002	0
28/05/2002	0
29/05/2002	0
30/05/2002	0
31/05/2002	0
1/06/2002	0
2/06/2002	0
3/06/2002	0
4/06/2002	8.5
5/06/2002	0
6/06/2002	0
7/06/2002	0
8/06/2002	0

PCC Whenua Tapu Average Year	
Time	Rainfall
21/04/2007	0
22/04/2007	0
23/04/2007	0
24/04/2007	0
25/04/2007	0
26/04/2007	0
27/04/2007	0
28/04/2007	1.5
29/04/2007	8.5
30/04/2007	0
1/05/2007	12
2/05/2007	2
3/05/2007	21
4/05/2007	3
5/05/2007	0
6/05/2007	0
7/05/2007	0
8/05/2007	0.5
9/05/2007	0
10/05/2007	0
11/05/2007	0
12/05/2007	0
13/05/2007	0
14/05/2007	0
15/05/2007	0
16/05/2007	0
17/05/2007	0
18/05/2007	0
19/05/2007	0
20/05/2007	0
21/05/2007	0.5
22/05/2007	9.5
23/05/2007	0.5
24/05/2007	0
25/05/2007	0
26/05/2007	0
27/05/2007	0
28/05/2007	0
29/05/2007	0
30/05/2007	0
31/05/2007	0
1/06/2007	0
2/06/2007	1
3/06/2007	9
4/06/2007	0
5/06/2007	0
6/06/2007	0
7/06/2007	0
8/06/2007	0

PCC Whenua Tapu Average Year	
Time	Rainfall
9/06/2002	6.5
10/06/2002	0
11/06/2002	0
12/06/2002	31.5
13/06/2002	5
14/06/2002	2
15/06/2002	33.5
16/06/2002	0
17/06/2002	0
18/06/2002	0
19/06/2002	0
20/06/2002	2.5
21/06/2002	0
22/06/2002	0
23/06/2002	2
24/06/2002	0
25/06/2002	0
26/06/2002	0
27/06/2002	0
28/06/2002	0
29/06/2002	16
30/06/2002	3

PCC Whenua Tapu Average Year	
Time	Rainfall
9/06/2007	0
10/06/2007	0
11/06/2007	0
12/06/2007	0.5
13/06/2007	0
14/06/2007	0
15/06/2007	0
16/06/2007	0
17/06/2007	0
18/06/2007	0
19/06/2007	2
20/06/2007	0
21/06/2007	5.5
22/06/2007	7.5
23/06/2007	1.5
24/06/2007	0
25/06/2007	0
26/06/2007	1
27/06/2007	0
28/06/2007	0
29/06/2007	0
30/06/2007	4

## **APPENDIX 2**

### **AJ Withrington Plumbers Ltd Water Tank System Installation Quote**



**A J Withrington Plumbers Limited**

P O Box 635  
Warkworth

Phone: 09-425-8413  
Mobile: 021-735-206  
Fax: 09-425-9783  
AJW.PLUMBERS@xtra.co.nz

# Fax

<b>To:</b> Iain Rabbits	<b>From:</b> Tony Withrington
<b>Fax:</b> 09-917-5001	<b>Pages:</b> 3
<b>Phone:</b>	<b>Date:</b> 16 April 2007
<b>Re:</b> Estimated costings re water tanks	<b>CC:</b>

Urgent   
  For Review   
  Please Comment   
  Please Reply   
  Please Recycle

Iain - to follow costings as discussed.

Regards

Tony Withrington

**A J Withrington Plumbers Limited**

P O Box 635  
Warkworth

Phone: 09-425-8413  
Mobile: 021-735-206  
Fax: 09-425-9783  
AJW.PLUMBERS@xtra.co.nz

16 April 2007

Harrison Grierson Consultants Ltd  
P O Box 5760  
Wellesley St  
Auckland

Attn: Iain Rabbitts - Senior Process Engineer

Dear Iain

Re: Estimated costings for rainwater installations - as instructed

**First installation for garden irrigation**

To supply and fit:

- D1000 (4500L) water tank
- Tank base/crushed fines (metal)
- First Flush diverter
- Strainer on pump
- PFI-30 pressure pump (electric)
- Associated valves and fittings
- Excavation of tank
- No electrical allowance


Estimated cost \$3,667.35 excluding GST

**Second installation for garden irrigation and toilet use**

To supply and fit:

- D1000 (4500L) water tank
- Tank base/crushed fines (metal)
- First Flush diverter
- Strainer on pump
- PFI-30 pressure pump (electric)
- Associated valves and fittings
- Excavation of tank
- No electrical allowance
- Reinstatement of walls - estimated \$500.00 excluding GST included in price below

Estimated cost \$6,327.35 excluding GST

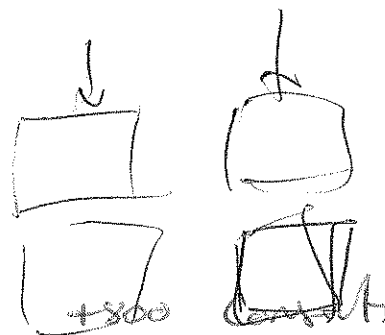

+800 concrete

**A J Withrington Plumbers Limited**P O Box 635  
MarkworthPhone: 09-425-8413  
Mobile: 021-735-206  
Fac: 09-425-9783  
AJW.PLUMBERS@XTR.CO.NZ**Third installation for entire house usage**

To supply &amp; fit:

- D5500 (25000L) water tank
- Tank base/crushed fines (metal)
- First Flush diverter
- Leave diverter
- Strainer on pump
- Associated valves and fittings
- CH2-40PC pressure pump (suit average house 1 x bathroom, 1 x ensuite)
- Filters and UV
- No electrical allowance

Estimated cost \$11,016.13 excluding GST

Note: All material prices included in each costing are retail figures. Labour costings on installation 1 is based on one days labour for two men – approx \$900-\$1000 excluding GST.

Installation 2 labour costing is based on 1.5 days for two men – approx \$2800-\$2900 excluding GST.


Installation 3 labour costing is based on two full days for two men – approx \$3800-\$3900 excluding GST.

On installation 3 it would be near impossible to cost out the gathering of d/pipes to be diverted into the bigger 25000L water tank which would be required for entire household usage due to different house designs (dug under d/ways, footpaths, under decks etc and more than three d/pipes). If I had to estimate this based on a three bedroom house with up to three d/pipes and a reasonable accessible location and dug to tank, an additional cost of \$1500-\$2000 excluding GST would be reasonable.

Each job and all of these prices might vary due to location of d/pipes, land gradients, accessibility of services etc, so I would take these costings as a reasonable indicative average cost per household unit based on current material costings and labour rates.

I hope this is helpful to you. Please do not hesitate to contact me to discuss this matter further.

Yours faithfully

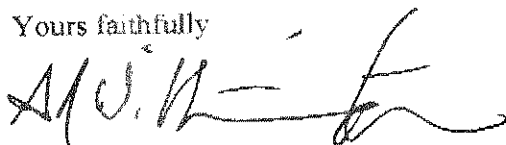

A J Withrington